

REHABILITATION BEDS

DREAM-TIM / DREAM-TIM PLUS REHABILITATION BED ELECTRICALLY CONTROLLED



extension arm with handle



DREAM-TIM PLUS
metal slats



precise nine-function
remote control



also available in
SONOMA OAK colour



165 kg
Max. user weight



67-78 kg
Weight

HEIGHT
ADJUSTMENT
38.6 - 80.6 cm




Medical Device



CE Certificate

- ✓ modern design
- ✓ DEWERT drives
- ✓ option of built-in bed tops
- ✓ metal or wooden slats
- ✓ simple assembly, disassembly and transport
- ✓ anti-Trendelenburg function as standard (0° to 12°)
- ✓ extension arm with handle as standard

DREAM-TIM LOW LOW REHABILITATION BED ELECTRICALLY CONTROLLED



extension arm with handle



precise nine-function
remote control



165 kg
Max. user weight



67-78 kg
Weight

HEIGHT
ADJUSTMENT
19.2 - 61.2 cm




Medical Device



CE Certificate

- ✓ modern design
- ✓ DEWERT drives
- ✓ option of built-in bed tops
- ✓ wooden slats
- ✓ simple assembly, disassembly and transport
- ✓ anti-Trendelenburg function as standard (0° to 12°)
- ✓ extension arm with handle as standard

REINFORCED BEDS

BARIATRIC VERSION

270 kg

MAX. USER WEIGHT

DREAM-TIM MAX

REHABILITATION BED


ELECTRICALLY CONTROLLED



reinforced extension arm with handle



precise ten-function remote control

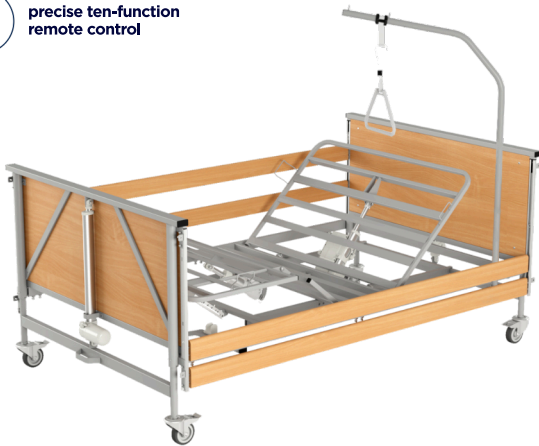


270 kg
Max. user weight

HEIGHT ADJUSTMENT
38.5 - 81.5 cm 


90,5-101,5 kg
Weight


Medical Device


CE Certificate

- ✓ modern design
- ✓ DEWERT drives
- ✓ option of built-in bed tops
- ✓ metal slats
- ✓ 120 cm wide lying surface
- ✓ simple assembly, disassembly and transport
- ✓ reinforced extension arm with handle as standard
- ✓ Trendelenburg and anti-Trendelenburg function as standard (0° to 12°)

DREAM-TIM MAX LOW

LOW REHABILITATION BED


ELECTRICALLY CONTROLLED



reinforced extension arm with handle



precise ten-function remote control

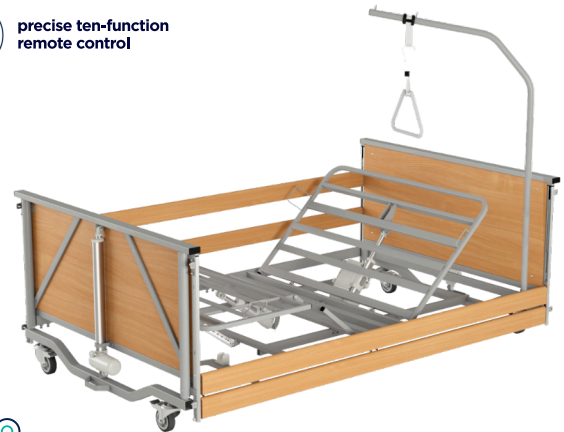


270 kg
Max. user weight

HEIGHT ADJUSTMENT
23,0 - 66,0 cm 


90,5 - 101,5 kg
Weight


Medical Device


CE Certificate

- ✓ modern design
- ✓ DEWERT drives
- ✓ option of built-in bed tops
- ✓ metal slats
- ✓ 120 cm wide lying surface
- ✓ simple assembly, disassembly and transport
- ✓ reinforced extension arm with handle as standard
- ✓ Trendelenburg and anti-Trendelenburg function as standard (0° to 12°)

Have a question?



Contact
+48 33 499 50 01



Send e-mail
kinga@timago.com
marek@timago.com
dorota.export@timago.com

SCAN THE QR CODE
TO SEE MORE ON THE
TIMAGO WEBSITE



TIMAGO.COM

TIMAGO.COM